

NYSEIN GAP PAD **Flextein® S100**

Product Description:

Flextein® S100 is a new, ultra-high thermal conductivity gap filler material. Its thermal conductivity is as high as 10W/m·k, and it is a thermally conductive material specially designed for high power consumption, high heat and high performance application scenarios. In addition to the high thermal conductivity of the material itself, it also has good compressibility and conformability, which makes it easier to adhere closely to electronic components, and at the same time covers the microscopic uneven surface so that the mating parts are fully contacted and the heat conduction efficiency is improved.

Flextein® S100 is naturally tacky on both sides and requires only a light pressure during assembly to secure components without adhesive. The thickness of the product can be customized in the range of 0.5-4mm according to the needs of customers, and one-sided adhesive can also be selected for ease of use.

Features & Benefits:

- Thermal conductivity 10 W/m·K
- Excellent workability
- V-0 flame rating
- Thickness range from 0.02" (0.50 mm) to 0.160" (4.0 mm)



Typical Property Data:

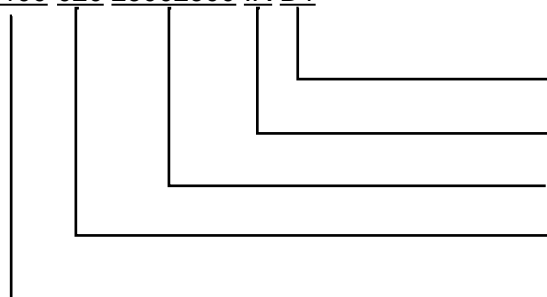
Property	Unit	Parameter	Test Method
Appearance	—	Light Grey	Visual
Thickness	mm	0.5 to 4.0	ASTM D374
Thermal Conductivity	W/m ·K	10.0	ISO 22007-2
Hardness	Shore OO	65	ASTM D2240
Density	g/cm ³	3.4	ASTM D792
Dielectric Strength	kV/mm	≥6.0	ASTM D149
Volume Resistivity	Ω ·cm	≥1.0×10 ¹²	ASTM D257
Dielectric Constant	0.5GHz	6.8	ASTM D150
Service Temp	°C	-40 to 150	Nystein
Flame Rating	—	V-0	94 UL
RoHS	—	Yes	Nystein

Typical Application:

- Computers , servers and their peripherals
- Smartphones, tablet and other multimedia
- High-end network equipment
- Optical communication modules

Configuration Available:

- Standard size 230×230 mm, sheet form and die-cut parts could be required.
- Standard thickness: 0.5mm (0.02") to 4mm (0.16") in 0.5mm (0.02") increments. Can be customized according to customer needs.
- Natural tack on one or both side option

Ordering Guide:Flextein® S100-020 23002300 IR D1

None:Double side tacky D1:Single side tacky A1:Single side adhesive

R:Rectangular;IR:Irregular

Size:230mm*230mm

Thickness:2.0mm

Series:S100

Storage conditions:

- Sealed at room temperature away from light, and stored in a dry place.
- Best Storage conditions: Temperature: 25°C (±3), Humidity: 50% (±10), can be stored for 12 months.
- The materials taken out after opening may be contaminated during use, so please do not mix contaminated products with unopened products.Nystein assumes no responsibility for contaminated products or conditions other than the required storage conditions.
- For additional information, please contact your appropriate sales, technical support, or customer service representative promptly.

Statement:

The information provided in this Technical Data Sheet (TDS), including product use and application recommendations, is based on our knowledge and experience with Nystein's products.The data contained in this TDS is for informational purposes only and is believed to be reliable. We cannot accept responsibility for the results obtained by others through methods beyond our control. This product can have a variety of applications and operating conditions in your environment that are beyond our control. Therefore, Nystein assumes no responsibility for the suitability of Nystein products for the processes and conditions under which you use them, as well as the intended application and results.We strongly recommend that you conduct tests to confirm the suitability of our products prior to use.

This product is protected by one or more Chinese patents or patent applications of Nystein.