

# NYSTEIN Thermal Gel Flextein® TG835NS

## Technical Data Sheet


### Product Description:

Flextein TG835NS is a high performance fluid type thermally conductive interface material for heat dissipation modules or components with wide variations in thickness. Its inherent adhesive properties eliminate the need for a bonding layer, while its good wetting properties improve heat transfer efficiency by allowing full contact between mating components. It does not need to be die-cut and can be directly dispensed between the heat generating device and the heat sink/shell, which can replace the thermal conductive gasket to improve the thermal conductivity and reduce the cost.

Unlike thermally conductive silicone grease, Flextein TG835NS thermally conductive gel is non-settling and non-flowing and is suitable for dispensing equipment, screen printing or squeegee application.

### Features & Benefits:

- Thermal conductivity 3.5 W/m·K
- The perfect combination of very low stress and low thermal resistance.
- High weatherability and reliability.
- Easy to dispense, good malleability, can be used instead of thermally conductive silicone grease.
- Fully cured.

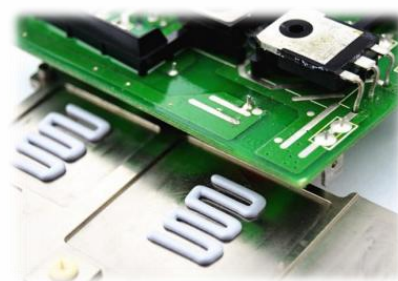

### Typical Property Data:

Property	Unit	Parameter	Test Method
Appearance	--	Light Blue	Visual
Min. Used Thickness	mm	0.15	ASTM D374
Extrusion rate	g/min	30	Nystein
Thermal Conductivity	W/m · K	3.5	ISO 22007-2
Density	g/cm <sup>3</sup>	2.2	ASTM D792
Thermal Resistance	@50 psi, °C·in <sup>2</sup> /W	0.154	ASTM D5470
Dielectric Strength	kV/mm	≥6.0	ASTM D149
TML(CVCM)	%	≤0.15 (0.05)	ASTM E595
Volume Resistivity	Ω ·cm	≥ 1.0 × 10 <sup>12</sup>	ASTM D257
Service Temp	°C	-40 to 110	Nystein
Flame Rating	—	V-0	94 UL
RoHS	—	Yes	Nystein

**Typical Application:**

- Smartphone, tablet multimedia
- High-end network equipment
- Optical communication module
- LED lighting equipment
- Automotive electronics
- Printed circuit board assemblies, enclosure connections

**Configuration Available:**

- 30cc, 55cc, 300cc Syringe.
- 1kg, 10kg pail.

**Storage conditions:**

- Sealed at room temperature away from light, and stored in a dry place.
- Best Storage conditions: Temperature: 25°C ( $\pm 3$ ), Humidity: 50% ( $\pm 10$ ), can be stored for 12 months.
- The materials taken out after opening may be contaminated during use, so please do not mix contaminated products with unopened products. Nystein assumes no responsibility for contaminated products or conditions other than the required storage conditions.
- For additional information, please contact your appropriate sales, technical support, or customer service representative promptly.

**Declare**

The information provided in this Technical Data Sheet (TDS), including product use and application recommendations, is based on our knowledge and experience with Nystein China products. The data contained in this TDS is for informational purposes only and is believed to be reliable. To obtain official product specifications for a specific product end use, please contact the sales, Application Engineer or customer service person with whom you are in contact.

We are not responsible for results obtained by others using methods beyond our control. This product may have a variety of applications and different operating conditions in your environment that are beyond our control. Therefore, Nystein China assumes no responsibility for the suitability of our products for the processes and conditions under which you will use them and for the intended applications and results. We strongly recommend that you conduct tests to confirm the suitability of our products prior to their use.

This product is protected by one or more of Nystein China Chinese patents or patent applications.