

## NYS-SEALOR® COE 603 Co-extruded Conductive Elastomer Gaskets

Co-Extruded gaskets (dual gaskets in single design with both a conductive and a non-conductive element, cured in parallel) provide additional environmental sealing and corrosion protection. Seam vulcanization ensures the long term integrity and stability of the gasket. Compared to bonding and mounting separate gaskets or double-groove designs, Co-Extruded gaskets offer design, cost and handling advantages.

NYS-SEALOR® COE 603 is made by NYS-SEALOR® ECE 503 & NYS-SEALOR® SR 300 which have the combination of excellent shielding effect and environmental sealing.




### SPECIFICATIONS:

Typical Performance		NYS-SEALOR® COE 603		Unit	Test Method
		Conductive	Non-Conductive		
Binder		ECE 503	SR 300	-	-
Conductive Particle		Ni/C	-	-	-
Hardness		65	55	Shore A	ASTM D2240
Density		1.9	1.2	g/cm <sup>3</sup>	ASTM D792
Volume Resistivity		0.1	-	Ohm-cm	MIL-DTL-83528C
Tensile Strength		200	900	PSI	ASTM D412
Elongation		150	300	%	ASTM D412
Tear Strength		30	60	PPI	ASTM D624
Shielding Effectiveness	500M	100	-	dB	MIL-DTL-83528C
	2G	100	-	dB	MIL-DTL-83528C
	18G	100	-	dB	MIL-DTL-83528C
Working Temperature		-55~+170		°C	ASTM D1329

### FEATURES & BENEFITS:

- High shielding possible with appropriate flange/enclosure materials and finishes – typically attenuation figures comfortably in excess of 100dB can be achieved up to 10GHz.
- Excellent environmental tightness performance.
- Remain serviceable even at temperature extremes typically -55°C to +170°C – lower and higher temperatures are possible.
- Low out-gassing.
- Cost-effective solution.

### COMMON PROFILES:

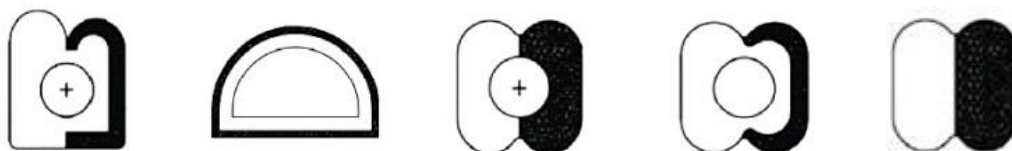

#### Declare:

The recommendation and data furnished by Nystein China is based on our experiment and experience to date. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Nystein China shall not be liable for their usage and processing. The technology data sheet is subject to change without notice. The final interpretation right of the contents of this specification belongs to Nystein China.